


Accsoon SeeMo Pro

User Manual

使用说明书

V1.0

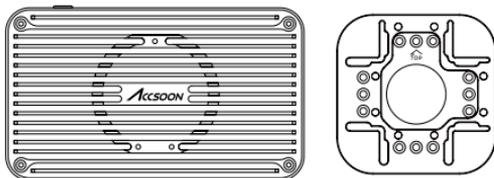

Accsoon SeeMo Pro	x 1
USB-C to Lightning Cable*	x 1
USB-C to USB-C Cable*	x 1
SeeMo Mount Bracket	x 1
M2.5*8 Screw	x 5
L Shape Wrench	x 1
User Manual	x 1

*Note:


1. Use only the included USB-C to Lightning cable to connect the Accsoon SeeMo product lines with your iPhone/iPad. Accsoon SeeMo product lines cannot be used with other brands' USB-C to Lightning cables.
2. The included cables are custom cables only for use with Accsoon SeeMo product lines. Please do not use the cable with products other than Accsoon SeeMo product lines otherwise Accsoon makes no commitment to the performance of the cable, and the user is responsible for the consequences.

SeeMo Pro


Contents

Accsoon SeeMo Pro	04
Introduction	06
Instruction	07
Specification	11
Warranty	12
Contact Us	13

SeeMo Pro

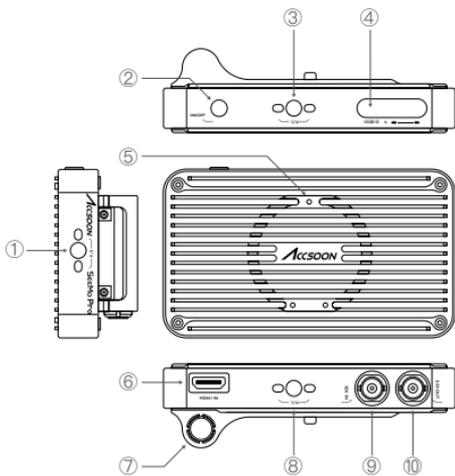

- ① 1/4"-20 Mounting Point
- ② Power Button
- ③ 1/4"-20 Mounting Point
- ④ Video Source and Power Level Indicator Light
- ⑤ Mounting Points for SeeMo Bracket
- ⑥ HDMI Input Port
- ⑦ 2 Pin DC Power Input

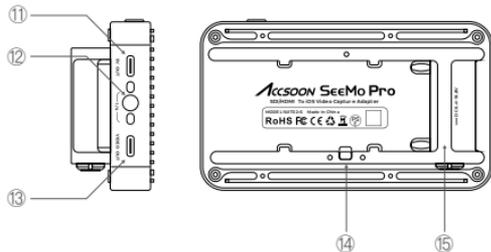

- ⑧ 1/4"-20 Mounting Point
- ⑨ SDI Input Port
- ⑩ SDI Loop Out Port
- ⑪ USB-C Power Output Port (5V Out)
- ⑫ 1/4"-20 Mounting Point
- ⑬ Video Output Port
- ⑭ Safety Lock
- ⑮ NP-F Battery Holder

Introduction

Built on the technology of the original SeeMo HDMI model, the SeeMo Pro SDI is a small box that goes in-between your camera or other SDI/HDMI source and your iOS device via Lightning or USB-C cable.

The SeeMo Pro SDI can accept HD signals up to 1080p 60fps over either HD SDI or HDMI from cameras, mixers, game consoles and wireless receivers.

SeeMo Pro connects your SDI or HDMI camera to the vast world of iOS connectivity and apps. You can now record, edit, stream and share video from your SDI camera as simply as if it were shot on your iPhone to start with. It opens up new ways of working, all with the simplicity and elegance of iOS apps and hardware.

Product Features

Turn your iPhone/iPad into a professional monitor
SDI in & loop out

HDMI in

Video input and output support up to 1080p 60fps

Powered by 2 pin DC or NP-F battery

iPhone and iPad charging

USB-C charging for other devices

H.264 video compression

Variable Bitrate

Visually lossless image quality

Rich monitoring features

Video and audio recording

RTMP live streaming

Flexible and versatile


Standard 1/4"-20 mounting points

Instruction

01 Download and install the Accsoon SEE App on your iPhone or iPad from Apple App Store.




02 Mount the Accsoon SeeMo Pro via a 1/4"-20 mounting point. To use with iPads, you can use with an Accsoon iPad PowerCage (optional product).

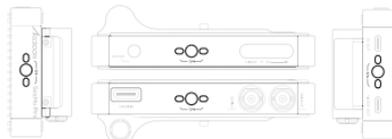


1/4"-20 mounting point × 4


03 Attach an NP-F series battery or connect to a DC power (6.4-16.8V).

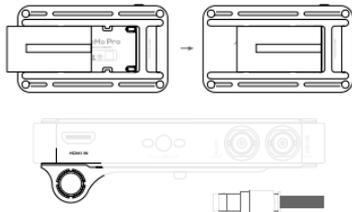


- 04** Connect the Accsoon SeeMo Pro to the camera using a SDI or HDMI cable (not included).




- 05** If there is a need to power other devices (e.g. Accsoon CineView series), connect the cable to the USB-C power output port.



- 06** Connect your iPhone/iPad to the Accsoon SeeMo Pro's USB-C video output port using the corresponding USB-C cable.

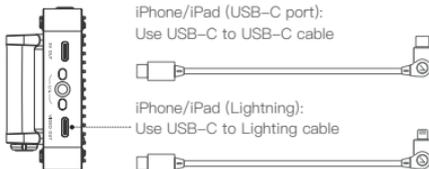


- 07** Power On | Power Off




Power On:
Press the power button and the power indicator light will turn on

Power Off:
Hold the power button for 2 seconds

- 08** Open the Accsoon SEE App, tap "Monitor" to start monitoring.




Attach the Accsoon SeeMo Pro to the Accsoon iPad PowerCage Gen 2 (optional product)

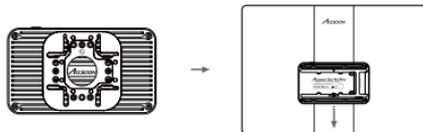

Screw the SeeMo bracket to the front of the Accsoon SeeMo Pro. Slide and lock down the Accsoon SeeMo Pro to the back of the iPad PowerCage Gen 2.

09 Status Indicator

Power level indicator



Video source indicator

On – Valid video input detected

Off – No valid video input




10 Live Streaming

Please make sure the iPhone/iPad can access the network via "WiFi" or "4G/5G" network.



Tap the "Live" button on the App, enter the RTMP live address and code then tap "OK" to start live streaming.

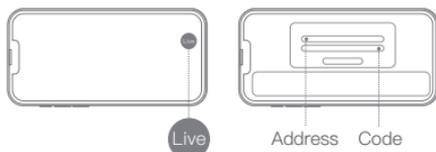

Note: The fluency of the live streaming depends on the stability of the internet connection. When the video is buffering, please check whether your internet connection is heavily loaded or your mobile network has poor reception quality.

Specification

Video Input Port	SDI in, HDMI in
SDI Video Input Format	1080p 23.98/24/25/29.97/30/50/59.94/60fps Level A/B 720p 50/59.94/60fps
SDI Loop Out Format	1080p 23.98/24/25/29.97/30/50/59.94/60fps Level A/B 720p 50/59.94/60fps
Video Output Port	SDI loop out, USB out
Video Output Format	1080p 24/25/30/50/60fps 720p 50/60fps
Battery Compatibility	NP-F550/F750/F970
Power Output Port	USB-C Output 5V/3A
Power Input Port	2 PIN DC Input 6.4~16.8V
iOS Version	iOS 12.0 or later
Power Consumption	3.5Watt (without charging other devices)
Operating Environment Temperature	-10°C ~40°C
Dimensions	125mm×72mm×35.5mm
Weight	224g

Warranty

01 Warranty Period

1. If there is a quality problem that occurs within 15 days after receiving the product, Accsoon will be providing complimentary maintenance or replacement.
2. Under proper use and maintenance, from the date of receipt, Accsoon will provide a one-year warranty on the product and a three-month warranty on the accessories and cables. Free maintenance service is available during the warranty period.
3. Please keep the proof of purchase and the user manual in a safe place.

02 Warranty Exclusions

1. Out of warranty (If the proof of purchase is not available, the warranty will be calculated from the date the product is delivered from the factory).
2. Damage caused by use or maintenance is not following the requirements of the product manual.
3. Unauthorized repair, modification or disassembly.
4. Damage caused by force majeure such as fire, flood, lightning strike, etc.

03 Warranty Process

1. Contact your local Accsoon authorized dealers for after-sales service. If there is no local authorized dealers, you can contact our customer service via our email (support@accsoon.com) or website (www.accsoon.com) and get appropriate support.
2. You will get detailed solutions from the authorized dealers or Accsoon.
3. Accsoon reserves the right to review the damaged product.

Safety Information

- When operating this equipment, read and follow all the instructions in this manual.
- Use only accessories/batteries/chargers specified or recommended by Accsoon.
- Do not expose to moisture, excessive heat or fire.
- Keep away from water and other liquids.
- Keep the equipment properly during lightning storms or when unused for long periods of time.
- Please do not use the product in a place overheating, under cooling or with lots of moisture, or nearby strong magnetic devices.
- To reduce the risk of fire or electric shock, refer servicing to qualified service personnel.

Contact Us

-  Facebook: Accsoon
-  Facebook Group: Accsoon Official User Group
-  Instagram: accsoontech
-  YouTube: ACCSOON
-  Email: Support@accsoon.com